


12 Volt Programmable 7 Day Digital Timer - Wiring Guide

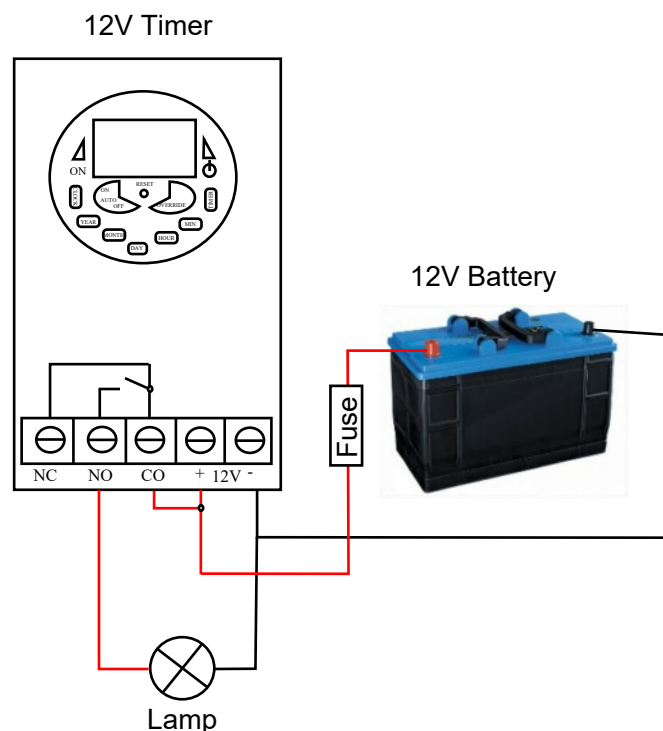

1. A Positive wire from the battery is connected to the + terminal on the timer through a suitable fuse
2. A link wire is connected from the + terminal to the CO terminal of the timer
3. A Negative wire from the battery is connected to the - terminal of the timer (Green light on the timer will light)
4. The positive wire of the lamp is connected to the NO terminal on the timer
5. The negative wire of the lamp is connected to the - terminal on the timer

To test press the on/off/auto button until the red light illuminates on the timer.

When the red light is lit the lamp will illuminate.

Guaranteed Performance

1 Years Manufacturers Warranty

Sunshine Solar Limited
Unit 30, Ashwellthorpe Industrial Estate Ashwellthorpe
Norwich Norfolk NR16 1ER

Tel: +44 (0)1508 488188

www.sunshinesolar.co.uk - trade@sunshinesolar.co.uk